

Second Edition

Save 10%

on Exam Vouchers

Coupon Inside!

CompTIA®

IT Fundamentals (ITF+)

STUDY GUIDE

EXAM FC0-U61

Includes interactive online learning environment and study tools:

2 custom practice exams

250 electronic flashcards

Searchable key term glossary

QUENTIN DOCTER

 **SYBEX**
A Wiley Brand

Take the Next Step
in Your IT Career

Save
10%
on Exam Vouchers*
(up to a \$35 value)

CompTIA®

Get details at
sybex.com/go/comptiavoucher

*Some restrictions apply. See web page for details.



CompTIA®

IT Fundamentals+ (ITF+)

Study Guide Exam FC0-U61

Second Edition



Quentin Docter

Senior Acquisitions Editor: Kenyon Brown
Development Editor: Gary Schwartz
Technical Editors: Chris Crayton and Jon Buhagiar
Senior Production Editor: Christine O'Connor
Copy Editor: Kim Wimpsett
Content Enablement and Operations Manager: Pete Gaughan
Production Manager: Kathleen Wisor
Executive Editor: Jim Minatel
Book Designers: Judy Fung and Bill Gibson
Proofreader: Nancy Carrasco
Indexer: Ted Laux
Project Coordinator, Cover: Brent Savage
Cover Designer: Wiley
Cover Image: Getty Images Inc./Jeremy Woodhouse

Copyright © 2018 by John Wiley & Sons, Inc., Indianapolis, Indiana

Published simultaneously in Canada

ISBN: 978-1-119-51312-4

ISBN: 978-1-119-51305-6 (ebk.)

ISBN: 978-1-119-51309-4 (ebk.)

Manufactured in the United States of America

No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, scanning or otherwise, except as permitted under Sections 107 or 108 of the 1976 United States Copyright Act, without either the prior written permission of the Publisher, or authorization through payment of the appropriate per-copy fee to the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, (978) 750-8400, fax (978) 646-8600. Requests to the Publisher for permission should be addressed to the Permissions Department, John Wiley & Sons, Inc., 111 River Street, Hoboken, NJ 07030, (201) 748-6011, fax (201) 748-6008, or online at <http://www.wiley.com/go/permissions>.

Limit of Liability/Disclaimer of Warranty: The publisher and the author make no representations or warranties with respect to the accuracy or completeness of the contents of this work and specifically disclaim all warranties, including without limitation warranties of fitness for a particular purpose. No warranty may be created or extended by sales or promotional materials. The advice and strategies contained herein may not be suitable for every situation. This work is sold with the understanding that the publisher is not engaged in rendering legal, accounting, or other professional services. If professional assistance is required, the services of a competent professional person should be sought. Neither the publisher nor the author shall be liable for damages arising herefrom. The fact that an organization or Web site is referred to in this work as a citation and/or a potential source of further information does not mean that the author or the publisher endorses the information the organization or Web site may provide or recommendations it may make. Further, readers should be aware that Internet Web sites listed in this work may have changed or disappeared between when this work was written and when it is read.

For general information on our other products and services or to obtain technical support, please contact our Customer Care Department within the U.S. at (877) 762-2974, outside the U.S. at (317) 572-3993 or fax (317) 572-4002.

Wiley publishes in a variety of print and electronic formats and by print-on-demand. Some material included with standard print versions of this book may not be included in e-books or in print-on-demand. If this book refers to media such as a CD or DVD that is not included in the version you purchased, you may download this material at <http://booksupport.wiley.com>. For more information about Wiley products, visit www.wiley.com.

Library of Congress Control Number: 2018950282

TRADEMARKS: Wiley, the Wiley logo, and the Sybex logo are trademarks or registered trademarks of John Wiley & Sons, Inc. and/or its affiliates, in the United States and other countries, and may not be used without written permission. CompTIA is a registered trademark of CompTIA, Inc. All other trademarks are the property of their respective owners. John Wiley & Sons, Inc. is not associated with any product or vendor mentioned in this book.

10 9 8 7 6 5 4 3 2 1

In memory of grandpa Joe, who taught me the fundamentals of IT and so much more.

Acknowledgments

First and foremost, I need to thank my family. Without their support and patience, I would never be able to work on projects like this.

This edition was more special than most, in that it left me with an unusual sense of pride as well as a realization of how long the road has been. When I wrote my first book, I dedicated it to my still-baking-in-the-oven oldest daughter. Now, she has enough expertise to be my SME and first proofreader for the programming chapter. She can code circles around me, and I'm proud of her (and my other kids too!).

They say it takes a village to produce a book, and it always amazes me at the number of people who are involved. I have been fortunate to work with a great Sybex crew yet again. Gary Schwartz was the development editor. Thanks, Gary, for keeping me on track and answering all of my mundane questions. Kenyon Brown was the acquisitions editor for this book—thank you, Kenyon, for asking me to take on this book.

In addition, Christine O'Connor was an excellent production editor; I appreciate her professionalism and pragmatism. Jon Buhagiar and Chris Crayton were my technical editors—thank you both for all of your ideas; you really made this book better. To Kim Wimpsett, the copy editor, thank you so much for dealing with my consistent grammar mistakes. I may not have the best grammar, but at least I am consistent about it!

About the Author

Quentin Docter started in the IT industry as a tech support agent for Packard Bell in 1994. Since then he has worked in tech support, network administration, consulting, training, web development, and project management. During his career, he has achieved certifications from CompTIA (including IT Fundamentals+ (ITF+)), Microsoft, Cisco, Novell, and Sun Microsystems. He is the author of several books, including the CompTIA A+ Complete Study Guide by Sybex, an imprint of Wiley.

Contents at a Glance

<i>Introduction</i>	<i>xxi</i>
<i>Assessment Test</i>	<i>xxxi</i>
Chapter 1	Core Hardware Components 1
Chapter 2	Peripherals and Connectors 63
Chapter 3	Computing Devices and the Internet of Things 121
Chapter 4	Operating Systems 173
Chapter 5	Software Applications 251
Chapter 6	Software Development 325
Chapter 7	Database Fundamentals 355
Chapter 8	Networking Concepts and Technologies 389
Chapter 9	Security Concepts and Threats 451
Chapter 10	Security Best Practices 489
Chapter 11	Business Continuity and Computer Support 535
Appendix A	Answers to Written Labs 589
Appendix B	Answers to Review Questions 597
<i>Index</i>	<i>613</i>

Contents

Introduction *xxi*

Assessment Test *xxx*

Chapter 1	Core Hardware Components	1
	Introducing Internal Components	3
	Exploring Motherboards, Processors, and Memory	4
	Motherboards	4
	Processors	22
	Memory	27
	Exploring Storage and Expansion Devices	33
	Hard Drives	33
	Optical Drives	42
	Video Cards	43
	Sound Cards	45
	Network Cards	46
	Modems	47
	Exploring Power and Cooling	48
	Power Supplies	48
	Cooling Systems	52
	Summary	55
	Exam Essentials	56
	Chapter 1 Written Lab	56
	Review Questions	59
Chapter 2	Peripherals and Connectors	63
	Understanding Common Peripherals, Interfaces, and Connectors	65
	Audio and Video Devices	66
	External Storage and Communications Connectors	80
	Input and Output Devices	92
	Understanding Installation Basics	109
	Reviewing Connector Types	113
	Summary	114
	Exam Essentials	115
	Chapter 2 Lab	116
	Review Questions	117

Chapter 3	Computing Devices and the Internet of Things	121
	Exploring Common Computing Devices	123
	Servers and Workstations	123
	Laptops	125
	Tablets and Smartphones	132
	Gaming Consoles	155
	Understanding the Internet of Things	158
	A Brief History of the Internet of Things	158
	Consumer Uses	159
	Commercial Uses	162
	Potential Issues	165
	Summary	167
	Exam Essentials	167
	Chapter 3 Lab	168
	Review Questions	169
Chapter 4	Operating Systems	173
	Operating System Fundamentals	175
	A Brief History of Operating Systems	176
	Basic Functions of Operating Systems	180
	Types of Operating Systems	185
	Managing an Operating System	207
	Managing Features and Interfaces	208
	Managing Folder and File Structures	229
	Summary	241
	Exam Essentials	241
	Chapter 4 Lab	242
	Review Questions	247
Chapter 5	Software Applications	251
	Understanding Application Architecture and Installation	254
	Application Design Concepts	255
	Software Management Best Practices	260
	Exploring Common Application Types	276
	File Extensions	277
	Productivity Software	280
	Collaboration Software	285
	Business Software	289
	Utility Software	293
	Web Browsers	304
	Summary	318
	Exam Essentials	319
	Chapter 5 Lab	320
	Review Questions	321

Chapter 6	Software Development	325
	Exploring Programming Languages	327
	Assembly Language	328
	Compiled Languages	333
	Interpreted Languages	335
	Query Languages	339
	Understanding Programming Concepts and Techniques	340
	Programming Logic	341
	Organizing Code	343
	Summary	347
	Exam Essentials	348
	Chapter 6 Lab	349
	Review Questions	350
Chapter 7	Database Fundamentals	355
	Understanding Databases	357
	Exploring Database Concepts and Structures	358
	Working with Databases	367
	Summary	380
	Exam Essentials	380
	Chapter 7 Lab	381
	Review Questions	384
Chapter 8	Networking Concepts and Technologies	389
	Exploring Connection Types and Features	391
	Choosing External Network Connections	392
	Choosing Internal Network Connections	403
	Understanding Network Connectivity Essentials	411
	Common Networking Devices	411
	Networking Protocol Basics	415
	TCP/IP Essentials	416
	Network Storage Options	424
	Setting Up a Wireless Network	428
	Basic Configuration	428
	Wireless Router Security	438
	Additional Wireless Router Services	440
	Summary	445
	Exam Essentials	445
	Chapter 8 Lab	446
	Part 1: Setting Up Your Wireless Router	446
	Part 2: Testing Your Neighbors	446
	Review Questions	447

Chapter 9	Security Concepts and Threats	451
	Understanding Hackers and Motives	454
	Understanding Security Threats	457
	Confidentiality Concerns	458
	Integrity Concerns	463
	Availability Concerns	465
	Software-Based Security Threats	468
	Understanding Access Control	476
	Authentication	476
	Authorization	479
	Accounting	480
	Nonrepudiation	482
	Summary	482
	Exam Essentials	483
	Chapter 9 Lab	484
	Review Questions	485
Chapter 10	Security Best Practices	489
	Understanding Security Best Practices	491
	Device Hardening	491
	Managing Users	515
	Using Data Encryption	520
	Summary	527
	Exam Essentials	528
	Chapter 10 Lab	529
	Review Questions	530
Chapter 11	Business Continuity and Computer Support	535
	Understanding Business Continuity	537
	Fault Tolerance	537
	Disaster Recovery	551
	Exploring Computer Support Concepts	552
	Understanding Troubleshooting Theory	552
	Troubleshooting Examples	563
	Summary	581
	Exam Essentials	582
	Chapter 11 Lab	583
	Review Questions	584

Appendix A	Answers to Written Labs	589
	Chapter 1: Core Hardware Components	590
	Chapter 2: Peripherals and Connectors	590
	Chapter 3: Computing Devices and the Internet of Things	591
	Chapter 4: Operating Systems	592
	Chapter 5: Software Applications	592
	Chapter 6: Software Development	592
	Chapter 7: Database Fundamentals	593
	Chapter 8: Networking Concepts and Technologies	593
	Chapter 9: Security Concepts and Threats	594
	Chapter 10: Security Best Practices	594
	Chapter 11: Business Continuity and Computer Support	594
 Appendix B	 Answers to Review Questions	 597
	Chapter 1: Core Hardware Components	598
	Chapter 2: Peripherals and Connectors	599
	Chapter 3: Computing Devices and the Internet of Things	600
	Chapter 4: Operating Systems	601
	Chapter 5: Software Applications	602
	Chapter 6: Software Development	604
	Chapter 7: Database Fundamentals	605
	Chapter 8: Networking Concepts and Technologies	606
	Chapter 9: Security Concepts and Threats	607
	Chapter 10: Security Best Practices	609
	Chapter 11: Business Continuity and Computer Support	610
 <i>Index</i>		 613

Table of Exercises

Exercise	1.1	Converting Between Decimal and Other Numbering Systems.	26
Exercise	1.2	Assessing Your Computer's RAM and Virtual Memory.	29
Exercise	1.3	Determining the Type of Installed RAM.	33
Exercise	1.4	Examining Hard Drives in Windows.	40
Exercise	2.1	Adjusting a Desktop Monitor.	76
Exercise	2.2	Changing the Settings for Multiple Monitors	78
Exercise	2.3	Changing Your Keyboard Layout in Windows 10	95
Exercise	2.4	Disabling a Touchpad in Windows 10.	100
Exercise	2.5	Configuring a Mouse	103
Exercise	2.6	Installing an IP Printer	111
Exercise	3.1	Changing Security Settings on IOS 11	139
Exercise	4.1	Creating a User Account in Windows 7	211
Exercise	4.2	Creating a User Account in Windows 10	213
Exercise	4.3	Changing Windows User Account Control	215
Exercise	4.4	Creating a Task with Task Scheduler	220
Exercise	4.5	Managing Virtual Memory in Windows 10	227
Exercise	4.6	Managing Storage Space in Windows 10	232
Exercise	4.7	Manipulating Files in Windows 10	239
Exercise	4.8	Creating a Shortcut in Windows 10	240
Exercise	5.1	Installing and Uninstalling Operating System Features	264
Exercise	5.2	Installing 7-Zip.	266
Exercise	5.3	Installing Free Applications.	266
Exercise	5.4	Configuring Windows Update.	272
Exercise	5.5	Using 7-Zip to Create an Archive	300
Exercise	5.6	Downloading and Installing Adobe Acrobat Reader	304
Exercise	5.7	Managing Cookies and Cache in Microsoft Edge	311
Exercise	5.8	Configuring the Edge Pop-Up Blocker	314
Exercise	6.1	Converting Between Decimal and Other Numbering Systems.	330
Exercise	6.2	Creating "Hello, world!" in HTML.	336
Exercise	7.1	Creating a Database and Tables in Microsoft Access 2016	372
Exercise	7.2	Importing Data from Excel to Access.	374
Exercise	8.1	Pricing Internet Connectivity.	403
Exercise	8.2	The Cost of Networking.	408

Exercise	8.3	Finding Your IP Configuration Information in Windows 10	422
Exercise	9.1	Testing Social Engineering	461
Exercise	10.1	Securing a Windows 10 PC from Unauthorized Local Use	495
Exercise	10.2	Starting and Stopping Services in Windows 10	505
Exercise	10.3	Configuring SmartScreen in Microsoft Edge	512
Exercise	10.4	Encrypting Local Folders in Windows 10	522
Exercise	10.5	Backing Up a Windows Security Certificate	524
Exercise	11.1	Setting Up a Backup in Windows 10	548
Exercise	11.2	Booting into Safe Mode in Windows 10	566
Exercise	11.3	Using System Restore in Windows 10	567
Exercise	11.4	Using the System Configuration Utility in Windows 10	570
Exercise	11.5	Creating a Desktop Shortcut for MSCONFIG	571
Exercise	11.6	Running an Application in Compatibility Mode	574
Exercise	11.7	Checking TCP/IP Connectivity	578

Introduction

If you're picking up this book, it means it's likely that either you're thinking about getting into the IT industry or you are relatively new to it. Either way, you are probably getting advice from nearly everyone you meet. One of the common refrains you probably hear is "Get certified!" With so many certifications out there, you might wonder where to start—CompTIA IT Fundamentals+ (ITF+) is that place.

Certification is one of the best things you can do for your career if you are working in, or want to break into, the IT profession, because it proves that you know what you're talking about regarding the subjects in which you're certified. It also powerfully endorses you as a professional in a way that's similar to a physician being board certified in a certain area of expertise. It can add to your résumé and make you more attractive to potential employers and more valuable as an employee. In these challenging economic times, keeping ahead of the competition—even standing out among your present colleagues—could make a big difference in whether you gain a promotion or not!

In this book, you'll find out what the IT Fundamentals+ (ITF+) exam is all about because each chapter covers a part of the exam. I've included some great review questions at the end of each chapter to help crystallize the information you learned and solidly prepare you to ace the exam. This book covers more than just the exam, though. I believe in providing my students with a foundation of IT knowledge that will prepare them for real jobs, not just to pass a test. After all, life is not a multiple-choice test with the answers clearly laid out in front of you!

A really cool thing about working in IT is that it's constantly evolving, so there are always new things to learn and fresh challenges to master. Once you obtain your IT Fundamentals+ (ITF+) certification and discover that you're interested in taking it further by getting into more complex topics (and making more money), the CompTIA A+ certification is definitely your next step.

What Is the CompTIA IT Fundamentals+ (ITF+) Certification?

IT Fundamentals+ (ITF+) is a certification developed by the Computing Technology Industry Association (CompTIA) that exists to provide resources and education for the computer and technology community. This is the same body that developed the A+ exam for PC technicians, Network+ for networking experts, and Security+ for security practitioners.

Way back in 1995, members of the organization got together to develop a new certification that tests skills for IT. To ensure industry-wide support, it was sponsored by many past and present IT industry leaders like these:

- Compaq Computers
- Digital Equipment Corporation (a part of Compaq)

- IBM
- Lotus
- Microsoft
- Novell
- TSS
- U.S. Robotics
- US West
- Wave Technologies

The IT Fundamentals+ (ITF+) exam was designed to test the skills of those with little to no experience in the field but who want to show that they have a broad general understanding of core IT topics. It tests areas such as computer hardware, operating systems and applications, basic networking, security, and setting up and maintaining a computer.

Why Become IT Fundamentals+ (ITF+) Certified?

Because CompTIA is a well-respected developer of vendor-neutral industry certifications, becoming IT Fundamentals+ (ITF+) certified proves that you have a base level of knowledge in the specific areas tested by the IT Fundamentals+ (ITF+) objectives.

Four major benefits are associated with becoming IT Fundamentals+ (ITF+) certified:

Proof of Professional Achievement Computer professionals are pretty competitive when it comes to collecting more certifications than their peers. And because the IT Fundamentals+ (ITF+) certification broadly covers the entire field of computers, it's a great stepping-stone to prove that you have what it takes to succeed in this industry. Because it's rare to gain something that's worth a lot with little effort, I'll be honest—preparing for the IT Fundamentals+ (ITF+) exam isn't exactly a lazy day at the beach. But passing the test is worth it because it will get the attention of potential employers.

Opportunity for Advancement We all like to get ahead in our careers—advancement results in more responsibility and prestige, and it usually means a fatter paycheck, greater opportunities, and added options. In the IT sector, a great way to make sure all that good stuff happens is by earning a lot of technology certifications, including IT Fundamentals+ (ITF+).

Fulfillment of Training Requirements IT Fundamentals+ (ITF+), because of its wide-reaching industry support, is recognized as a baseline of computer knowledge. This can potentially fulfill IT-related training requirements set forth by your company.

Customer Confidence As companies discover the CompTIA advantage, they will undoubtedly require qualified staff to achieve these certifications. Many companies outsource their work to consulting firms with experience working with security. Firms that have certified staff have a definite advantage over firms that don't.

How to Become IT Fundamentals+ (ITF+) Certified

As this book goes to press, Pearson VUE is the sole IT Fundamentals+ (ITF+) exam provider. The following is the necessary contact information and exam-specific details for registering. Exam pricing might vary by country or by CompTIA membership.

Vendor	Website	Phone Number
Pearson VUE	www.pearsonvue.com/comptia	U.S. and Canada: 877-551-PLUS (7587)

When you schedule the exam, you'll receive instructions regarding appointment and cancellation procedures, ID requirements, and information about the testing center location. In addition, you'll receive a registration and payment confirmation letter. Exams can be scheduled up to six weeks out or as late as the next day (or, in some cases, even the same day).



Exam prices and codes may vary based on the country in which the exam is administered. For detailed pricing and exam registration procedures, refer to CompTIA's website at www.comptia.org.

After you've successfully passed your IT Fundamentals+ (ITF+) exam, CompTIA will award you a certification. Within four to six weeks of passing the exam, you'll receive your official CompTIA IT Fundamentals+ (ITF+) certificate and ID card. (If you don't receive these within eight weeks of taking the test, contact CompTIA directly using the information found in your registration packet.)

Tips for Taking the IT Fundamentals+ (ITF+) Exam

Here are some general tips for taking your exam successfully:

- Bring two forms of ID with you. One must be a photo ID, such as a driver's license. The other can be a major credit card or a passport. Both forms must include a signature.
- Arrive early at the exam center so you can relax and review your study materials, particularly tables and lists of exam-related information. Once you are ready to enter the testing room, you will need to leave everything outside; you won't be able to bring any materials into the testing area.
- Read the questions carefully. Don't be tempted to jump to an early conclusion. Make sure you know exactly what each question is asking.
- Don't leave any unanswered questions. Unanswered questions are scored against you. There will be questions with multiple correct responses. When there is more than one correct answer, a message at the bottom of the screen will prompt you either to

“choose two” or “choose all that apply.” Be sure to read the messages displayed to know how many correct answers you must choose.

- When answering multiple-choice questions about which you’re unsure, use a process of elimination to get rid of the obviously incorrect answers first. Doing so will improve your odds if you need to make an educated guess.
- On form-based tests (nonadaptive), because the hard questions will take the most time, save them for last. You can move forward and backward through the exam.
- For the latest pricing on the exams and updates to the registration procedures, visit CompTIA’s website at www.comptia.org.

Who Should Read This Book?

You—if you want to pass the IT Fundamentals+ (ITF+) exam and pass it confidently! This book is chock-full of the exact information you need and directly maps to IT Fundamentals+ (ITF+) exam objectives (listed later in this Introduction), so if you use it to study for the exam, your odds of passing shoot way up.

In addition to including every bit of knowledge you need to learn to pass the exam, I’ve included some really great tips and solid wisdom to equip you even further to work successfully in the real IT world.

What Does This Book Cover?

This book covers everything you need to know to pass the CompTIA IT Fundamentals+ (ITF+) exam. But in addition to studying the book, it’s a good idea to practice on actual computers if you can.

Here’s a list of the 11 chapters in this book:

Chapter 1, “Core Hardware Components” This chapter introduces you to the core insides of a computer, specifically motherboards, processors, memory, storage, expansion slots, power, and cooling systems.

Chapter 2, “Peripherals and Connectors” While core hardware is important, users can truly customize their computer experience by adding peripheral hardware. To connect all of those toys to your system, you need to know which connectors to use, and this chapter teaches you all of that.

Chapter 3, “Computing Devices and the Internet of Things” Now that you’ve learned about all of the individual hardware components, how do they all work together? This chapter discusses features of servers, workstations, laptops, tablets, smartphones, and gaming consoles. It also introduces the Internet of Things (IoT), which can turn practically anything into a device.

Chapter 4, “Operating Systems” Without an operating system, computer hardware makes a pretty good doorstop. The operating system is the most critical piece of software on a computer, because it coordinates the efforts of the hardware and provides an interface for the user to interact with the machine.

Chapter 5, “Software Applications” This chapter covers a variety of common application types that reside on computers, such as productivity software, collaboration software, business software, anti-malware utilities, and web browsers. It also teaches you about application design concepts, software management, and the proper ways to install, uninstall, and manage applications.

Chapter 6, “Software Development” Have you ever wondered how applications get created? This chapter will teach you the characteristics of several classes of programming languages. You will also see examples of code, programming logic, and organizational methods.

Chapter 7, “Database Fundamentals” Databases are a key part of computing systems today. Data is the new currency, and therefore databases are like a bank vault. This chapter walks you through database concepts and structures, and it shows you some methods to interact with databases.

Chapter 8, “Networking Concepts and Technologies” Who doesn’t want to get on the Internet? Wireless networks are popular today as a method to get Internet connectivity. You’ll learn about key networking technologies and how to configure a wireless router in this chapter.

Chapter 9, “Security Concepts and Threats” The downside to computers is that it seems like hackers are everywhere. This chapter will introduce you to common threats posed by would-be attackers so you know how to avoid them. It also introduces a security framework and access control concepts.

Chapter 10, “Security Best Practices” This chapter builds on Chapter 9 by showing you how to set up your system to protect it against attacks. You will learn about hardening devices, managing users, and using data encryption.

Chapter 11, “Business Continuity and Computer Support” Inevitably, computers will run into problems—it’s the nature of electronic components. This chapter will show you how to troubleshoot any issues that pop up. *Warning:* After reading this chapter, all of your family members will call on you for technical support (if they don’t already)! This chapter also shows you how to plan for eventual computer problems so that you don’t totally lose your data.

What’s Included in the Book

I’ve included the following study tools throughout the book:

Assessment Test At the end of this Introduction is an Assessment Test that you can use to check your readiness for the exam. Take this test before you start reading the book; it will help you determine the areas where you might need to brush up. The answers to the Assessment Test questions appear on separate pages after the last question of the test. Each answer includes an explanation and a note telling you the chapter in which the material appears.

Objective Map and Opening List of Objectives Just before the Assessment Test, you’ll find a detailed exam objective map, showing you where each of the CompTIA exam objectives

is covered in this book. In addition, each chapter opens with a list of the exam objectives it covers. Use these to see exactly where each of the exam topics is covered.

Exam Essentials Each chapter, just after the summary, includes a number of exam essentials. These are the key topics that you should take from the chapter in terms of areas to focus on when preparing for the exam.

Lab Exercises Each chapter includes a hands-on lab to give you more experience. These exercises map to the exam objectives. Some ask specific questions, and you can find the answers to those questions in Appendix A.

Chapter Review Questions To test your knowledge as you progress through the book, there are 20 review questions at the end of each chapter. As you finish each chapter, answer the review questions and then check your answers—the correct answers and explanations are in Appendix B. You can go back to reread the section that deals with each question you got wrong in order to ensure that you answer correctly the next time you're tested on the material.

Interactive Online Learning Environment and Test Bank

The interactive online learning environment that accompanies *CompTIA IT Fundamentals+ (ITF+) Study Guide: Exam FC0-U61, Second Edition*, provides a test bank with study tools to help you prepare for the certification exam and increase your chances of passing it the first time! The test bank includes the following:

Sample Tests All of the questions in this book are provided online, including the Assessment Test, which you'll find at the end of this Introduction, and the Chapter Tests, which include the review questions at the end of each chapter. In addition, there are two Practice Exams. Use these questions to test your knowledge of the study guide material. The online test bank runs on multiple devices.

Flashcards Questions are provided in digital flashcard format (a question followed by a single correct answer). You can use the flashcards to reinforce your learning and provide last-minute test prep before the exam.

Other Study Tools A glossary of key terms from this book and their definitions is available as a fully searchable PDF.



Go to www.wiley.com/go/sybextestprep to register and gain access to this interactive online learning environment and test bank with study tools.

How to Use This Book

If you want a solid foundation for the serious effort of preparing for the IT Fundamentals+ (ITF+) exam, then look no further because I've spent countless hours putting together this book with the sole intention of helping you to pass it!

This book is loaded with valuable information, and you will get the most out of your study time if you understand how I put the book together. Here's a list that describes how to approach studying:

1. Take the Assessment Test immediately following this Introduction. (The answers are at the end of the test, but no peeking!) It's okay if you don't know any of the answers—that's what this book is for. Carefully read over the explanations for any question you get wrong, and make note of the chapters where that material is covered.
2. Study each chapter carefully, making sure you fully understand the information and the exam objectives listed at the beginning of each one. Again, pay extra-close attention to any chapter that includes material covered in questions you missed on the Assessment Test.
3. Complete the lab exercise at the end of each chapter. Do *not* skip these exercises. One reason is that they directly map to the CompTIA objectives and reinforce the material. Another reason is that it gives you hands-on experience, which is crucial.
4. Answer all the review questions related to each chapter. Specifically, note any questions that confuse you, and study the corresponding sections of the book again. And don't just skim these questions—make sure you understand each answer completely.
5. Try your hand at the Practice Exams. The more questions you practice, the better you will be when you sit for the real exam.
6. Test yourself using all of the electronic flashcards. This is a new and updated flashcard program to help you prepare for the latest CompTIA IT Fundamentals+ (ITF+) exam, and it is a really great study tool.

Learning every bit of the material in this book is going to require you to apply yourself with a good measure of discipline. So, try to set aside the same time period every day to study, and select a comfortable and quiet place to do so. If you work hard, you will be surprised at how quickly you learn this material.

If you follow the steps listed here and study with the Review Questions, Practice Exams, electronic flashcards, and all of the written labs, you would almost have to try to fail the CompTIA IT Fundamentals+ (ITF+) exam. However, studying for the IT Fundamentals+ (ITF+) exam is like training for a marathon—if you don't go for a good run every day, you're not likely to finish very well.

Exam Objectives

Speaking of objectives, you're probably pretty curious about them, right? CompTIA asked groups of IT professionals to fill out a survey rating the skills they felt were important in their jobs, and the results were grouped into objectives for the exam and divided into six domains.

This table gives you the extent by percentage in which each domain is represented on the actual examination.

Domain	% of Examination
1.0 IT Concepts and Terminology	17%
2.0 Infrastructure	22%
3.0 Applications and Software	18%
4.0 Software Development	12%
5.0 Database Fundamentals	11%
6.0 Security	20%
Total	100%



Exam objectives are subject to change at any time without prior notice and at CompTIA's sole discretion. Please visit CompTIA's website (www.comptia.org) for the most current listing of exam objectives.

CompTIA IT Fundamentals+ (ITF+) Study Guide

FC0-U61 Exam Objectives

Objective	Chapter
1.0 IT Concepts and Terminology	
1.1 Compare and contrast notational systems.	6
1.2 Compare and contrast fundamental data types and their characteristics.	6
1.3 Illustrate the basics of computing and processing.	1
1.4 Explain the value of data and information.	9
1.5 Compare and contrast common units of measure.	1, 2
1.6 Explain the troubleshooting methodology.	11

Objective	Chapter
2.0 Infrastructure	
2.1 Classify common types of input/output device interfaces.	2
2.2 Given a scenario, set up and install common peripheral devices to a laptop/PC.	2
2.3 Explain the purpose of common internal computing components.	1
2.4 Compare and contrast common Internet service types.	8
2.5 Compare and contrast storage types.	1, 8
2.6 Compare and contrast common computing devices and their purposes.	3
2.7 Explain basic networking concepts.	8
2.8 Given a scenario, install, configure and secure a basic wireless network.	8
3.0 Applications and Software	
3.1 Manage applications and software.	4
3.2 Compare and contrast components of an operating system.	4
3.3 Explain the purpose and proper use of software.	5
3.4 Explain methods of application architecture and delivery models.	5
3.5 Given a scenario, configure and use web browsers.	5
3.6 Compare and contrast general application concepts and uses.	5
4.0 Software Development Concepts	
4.1 Compare and contrast programming language categories.	6
4.2 Given a scenario, use programming organizational techniques and interpret logic.	6
4.3 Explain the purpose and use of programming concepts.	6

Objective	Chapter
5.0 Database Fundamentals	
5.1 Explain database concepts and the purpose of a database.	7
5.2 Compare and contrast various database structures.	7
5.3 Summarize methods used to interface with databases.	7
6.0 Security	
6.1 Summarize confidentiality, integrity, and availability concepts.	9
6.2 Explain methods to secure devices and best practices.	10
6.3 Summarize behavioral security concepts.	10
6.4 Compare and contrast authentication, authorization, accounting, and non-repudiation concepts.	9
6.5 Explain password best practices.	10
6.6 Explain common uses of encryption.	10
6.7 Explain business continuity concepts.	11

Assessment Test

1. Which of the following optical discs will store the most data?
 - A. CD-ROM
 - B. DVD-ROM DL
 - C. DVD-ROM DS
 - D. RS-ROM
2. Which of the following devices are used for persistent user data storage in a computer?
(Choose two.)
 - A. HDD
 - B. RAM
 - C. ROM
 - D. SSD
3. Which of the following on your computer is considered firmware?
 - A. RAM
 - B. SSD
 - C. CMOS
 - D. BIOS
4. What was the first widely adopted video connector standard?
 - A. CGA
 - B. VGA
 - C. XGA
 - D. DVI
5. What type of removable storage is often used in digital cameras?
 - A. Flash drive
 - B. NAS
 - C. Memory card
 - D. Mobile media card
6. Which of the following peripherals is considered an input device?
 - A. Scanner
 - B. Printer
 - C. Touchscreen
 - D. Flash drive

7. Angela has an iPhone with a biometric scanner enabled. She powered the device off and just turned it back on. What methods can she use to unlock her phone?
 - A. Fingerprint only
 - B. Passcode only
 - C. Fingerprint or passcode
 - D. Fingerprint, passcode, or iris scan
8. You are setting up a new Wi-Fi connection on your iPad. What is the first step in the process?
 - A. Enter wireless password
 - B. Verify Internet connection
 - C. Verify wireless capabilities
 - D. Locate SSID
 - E. Turn on Wi-Fi
9. What type of security is involved when pairing two Bluetooth devices together?
 - A. SSL certificates are exchanged.
 - B. A PIN is provided by the Bluetooth device.
 - C. The Bluetooth security layer negotiates the security mechanism.
 - D. There is no security involved.
10. Which operating system named its versions after large cats?
 - A. iOS
 - B. OS X
 - C. Android
 - D. Chrome OS
11. Your computer has a 64-bit CPU. Which statement is true regarding which operating systems you can install on it?
 - A. 64-bit operating systems only
 - B. 64-bit or 32-bit operating systems
 - C. 32-bit operating systems only
 - D. It depends on how much RAM is in your system.
12. Which type of operating system allows you to run multiple operating systems at once on one computer?
 - A. Embedded OS
 - B. Server OS
 - C. Hypervisor
 - D. Mobile device OS

13. Which of the following is not considered productivity software?
 - A. Spreadsheet software
 - B. Web browser
 - C. Online workspace
 - D. Visual diagramming software
14. Which of the following is required for a website to show up as a secure website in a browser?
 - A. Private browsing
 - B. Client-side scripting
 - C. Valid certificate
 - D. Compatible browser
15. Which of the following terms best describes an application with separate database, business logic, and application layers?
 - A. N-tier
 - B. Cloud hosted
 - C. Local network hosted
 - D. Three tier
16. Which data type exists only in true and false states?
 - A. Binary
 - B. Boolean
 - C. Char
 - D. Float
17. Code that is not part of the functionality of the program but is intended to be easy for people to read is called what?
 - A. Compiled
 - B. Interpreted
 - C. Commented
 - D. Pseudocode
18. Which of the following container types has a fixed length?
 - A. Constant
 - B. Array
 - C. Vector
 - D. String

19. When creating a relational database, what is the name of the rules and structure?
- A. Forms
 - B. Tables
 - C. Schema
 - D. Constraints
20. Which of the following statements is true regarding a foreign key in a relational database?
- A. They are required.
 - B. There can be only one per table.
 - C. They are automatically indexed.
 - D. Null values are allowed.
21. David, a database administrator, needs to remove a column from an existing database. Which command should he use?
- A. ALTER
 - B. DELETE
 - C. DROP
 - D. REMOVE
22. You open your web browser and type in `www.google.com`, but your computer can't find the website. Your neighbor's computer finds it just fine. What is most likely the cause?
- A. Incorrect DNS configuration
 - B. Incorrect DHCP configuration
 - C. Incorrect WPA2 configuration
 - D. The website is down.
23. Your friend Marcos asks you which of the following are the most secure. What do you tell him?
- A. 802.11n
 - B. Infrared
 - C. Fiber-optic
 - D. UTP
24. You need to set up a wireless router for a friend. He wants to be sure that his network is secure. Which wireless security method should you implement?
- A. WPA2
 - B. WPA
 - C. NAT
 - D. WEP

- 25.** You have just created a new logo for your company. What should you get to protect the intellectual property?
- A.** Trademark
 - B.** Copyright
 - C.** Patent
 - D.** Asset protection
- 26.** A user has been accused of hacking into a server. Which of the following would keep him from denying that he did it?
- A.** Authentication
 - B.** Authorization
 - C.** Accounting
 - D.** Nonrepudiation
- 27.** Your manager read about a replay attack and is worried a hacker will try to use it on your network. What type of concern is this?
- A.** Confidentiality
 - B.** Integrity
 - C.** Availability
 - D.** Authentication
- 28.** Which of the following are considered device-hardening techniques? (Choose two.)
- A.** Disabling Bluetooth
 - B.** Requiring complex passwords
 - C.** Enabling single sign-on
 - D.** Installing antispyware software
- 29.** For security purposes, which of the following user accounts are disabled by default?
- A.** Guest
 - B.** Users
 - C.** Power Users
 - D.** Administrator
- 30.** You are browsing the Internet to purchase a gift for a friend. What two things should you look for to ensure that it's safe to enter your credit card information? (Choose two.)
- A.** Security seal of approval
 - B.** RSA Secure Access symbol
 - C.** A lock symbol
 - D.** HTTPS://

- 31.** You just installed a new HP printer on your Dell computer and it's not printing. What is the first source to check for information on the problem?
- A.** Dell's website
 - B.** HP's website
 - C.** Google search
 - D.** Internet technical community groups
- 32.** When configuring a backup solution for your computer, you decide that speed is the most important factor. Which storage option should you choose?
- A.** Locally attached storage
 - B.** Network attached storage
 - C.** Cloud storage
 - D.** Offline storage
- 33.** You have just completed a backup of your PC onto an optical disc. What is the next step you need to take?
- A.** Store the backup in a secure location.
 - B.** Burn the disc to ensure the data is saved.
 - C.** Test the backup to verify it works.
 - D.** Copy the backup data to a cloud.

Answers to the Assessment Test

1. C. A double-sided DVD-ROM can store more data than a dual-layer DVD-ROM, and both can store much more than a CD-ROM. There is no RS-ROM. See Chapter 1 for more information.
2. A, D. Hard disk drives (HDDs) are used to store user data in a persistent manner, meaning that data is retained after the power is turned off. Solid-state drives (SSDs) are one type of hard drive. See Chapter 1 for more information.
3. D. The basic input output system (BIOS) is firmware. It's stored on a hardware chip called the CMOS. See Chapter 1 for more information.
4. B. VGA was the first widely used video connector standard, and it was released in 1987. See Chapter 2 for more information.
5. C. Digital cameras use memory cards. The most popular form of memory card on the market today is the SD card. See Chapter 2 for more information.
6. A. Scanners are input devices. Printers produce output. Touchscreens and flash drives are both input and output devices. See Chapter 2 for more information.
7. B. With biometrics enabled, you can use either the passcode or your fingerprint to access a locked device. However, if it was just powered off, the only option is to enter the passcode. See Chapter 3 for more information.
8. C. The proper steps in order are to verify wireless capabilities, turn on Wi-Fi, locate SSID, enter wireless password, and verify Internet connection. See Chapter 3 for more information.
9. B. When pairing two Bluetooth devices, you need to enter the PIN into your mobile device that allows it to connect to the Bluetooth device. See Chapter 3 for more information.
10. B. Apple's OS X was named for large cats. Now versions are named after locations in California. See Chapter 4 for more information.
11. B. A 64-bit processor can handle 32-bit or 64-bit OSs. It is a waste of power to use a 32-bit OS on it, but it will work. See Chapter 4 for more information.
12. C. A hypervisor is a program that allows you to run a virtual operating system within another operating system. See Chapter 4 for more information.
13. C. Online workspace is an example of collaboration software. See Chapter 5 for more information.
14. C. Secure websites are required to have a valid security certificate. See Chapter 5 for more information.
15. D. A three-tier application will have separate database, business logic, and application layers. Three tier is a specific type of n-tier application architecture model. See Chapter 5 for more information.

16. B. The Boolean data type uses only true and false. Oftentimes they are represented with a 1 for True and a 0 for False, but this does not have to be the case. See Chapter 6 for more information.
17. D. Pseudocode is used for annotation, and it does not affect the functionality of the program. See Chapter 6 for more information.
18. B. Arrays and vectors are the two container types. Arrays have a fixed length, and vectors can have a dynamically allocated length. See Chapter 6 for more information.
19. C. The schema is the rules and structure of a relational database. See Chapter 7 for more information.
20. D. A foreign key is one or more columns in a table that refers to the primary key in another table. Unlike primary keys, null values are allowed. Foreign keys are not required, there can be more than one per table, and they are not automatically indexed. See Chapter 7 for more information.
21. A. The ALTER command is used to add, remove, or modify columns in a database. DROP is used to remove a table or database. DELETE is used to delete a record, and there is no REMOVE command. See Chapter 7 for more information.
22. A. DNS servers resolve host names to IP addresses. It's possible that your computer has the wrong address for the DNS server. DHCP automatically configures TCP/IP clients, and WPA2 is a security protocol. If the website was down, your neighbor would not be able to access it either. See Chapter 8 for more information.
23. C. Wired connections are more secure than wireless ones. Fiber-optic cable is also immune to wiretaps, which makes it more secure than UTP. See Chapter 8 for more information.
24. A. WPA2 is the most secure wireless security protocol in use today. See Chapter 8 for more information.
25. A. A trademark is used to protect a word, words, or a symbol legally registered as representing a company or a product. See Chapter 9 for more information.
26. D. The framework for access control is AAA—authentication, authorization, and accounting. Nonrepudiation is added, which makes it so people can't deny that an event took place. See Chapter 9 for more information.
27. B. A replay attack is an example of an integrity concern. Other examples are man-in-the-middle attacks, impersonation, and unauthorized information alteration. See Chapter 9 for more information.
28. A, D. Device hardening makes it harder for attackers to gain access to your system by reducing the potential areas of attack. Two examples of device hardening are disabling unused or unneeded services and installing anti-malware. See Chapter 10 for more information.
29. A. The Guest account is disabled by default, and it should remain disabled if it is not being used. See Chapter 10 for more information.

- 30.** C, D. Secure websites will start with HTTPS:// instead of HTTP://. In addition, there will be a lock symbol near the address in the address bar. See Chapter 10 for more information.
- 31.** B. Always check the manufacturer's website first. Since it's an HP printer, check its site and not Dell's. See Chapter 11 for more information.
- 32.** A. When choosing a backup solution, know that locally attached storage devices will always be faster than network storage or cloud-based solutions. See Chapter 11 for more information.
- 33.** C. After completing a backup, you should verify that the backup is working properly. See Chapter 11 for more information.

Chapter 1

Core Hardware Components

**THE FOLLOWING COMPTIA IT
FUNDAMENTALS+ (ITF+) FC0-U61 EXAM
OBJECTIVES ARE COVERED IN THIS
CHAPTER:**

✓ **1.3 Illustrate the basics of computing and processing**

- Input
- Processing
- Output
- Storage

✓ **1.5 Compare and contrast common units of measure**

- Storage unit
 - Bit
 - Byte
 - KB
 - MB
 - GB
 - TB
 - PB
- Processing speed
 - MHz
 - GHz

✓ **2.3 Explain the purpose of common internal computing components**

- Motherboard/system board
- Firmware/BIOS





- RAM
- CPU
 - ARM
 - Mobile phone
 - Tablet
 - 32-bit
 - Laptop
 - Workstation
 - Server
 - 64-bit
 - Laptop
 - Workstation
 - Server
- GPU
- Storage
 - Hard drive
 - SSD
- Cooling
- NIC
 - Wired vs. wireless
 - Onboard vs. add-on card

✓ 2.5 Compare and contrast storage types

- Volatile vs. non-volatile
- Local storage types
 - RAM
 - Hard drive
 - Solid state vs. spinning disk
 - Optical
 - Flash drive



What better way to kick off a book on IT Fundamentals+ (ITF+) than to talk about the most fundamental components of all—core hardware? When you really break it down to the basics, computers are simply collections of specialized hardware devices that work together (with software) to provide you with the functionality you want. For most users, the desired functionality is to take input, somehow process it, produce output (video or printed), and store data. Sometimes the hardware is in your hands, and at other times it's halfway around the world—but it's always necessary. Even soft and fluffy-sounding terms such as “the cloud” (which I will introduce in Chapter 5, “Software Applications”) rely on much of the same hardware that sits snugly within your tablet or smartphone case.

To begin your journey of understanding fundamental IT concepts, I will discuss components that are commonly included inside the case. Some are absolutely critical, while others just provide features that are nice to have, such as sound or a network connection. In this way, I'll start from the inside out so that you understand what makes computers work the way they do.

Introducing Internal Components

In this section, I will talk about the components that are generally inside the computer case. Some of them are exclusively found inside the case, such as the motherboard and the processor, whereas others can be internal or external. For example, internal hard drives (for storage) are standard in desktop and laptop computers, but you can also buy external hard drives for expanded storage. Network cards are another great example. Today, the circuitry is generally built into the computer, but you can easily find external ones as well. Regardless of the location of your hard drive or network card, it still provides the same functionality.

Most home computer components are modular. That is, they can be removed and replaced by another piece of hardware that does the same thing, provided that it's compatible and that it fits. For example, if the hard drive in your laptop fails, it can be removed and replaced by another hard drive. This isn't always the case, of course, and the general rule is that the smaller the device, the less modular it is. This is because to achieve the smaller size, manufacturers need to integrate more functionality into the same component. It's usually quicker and just as cost-effective to replace a device such as a smartphone rather than repair it if a part fails. If a component is modular and can be replaced, you will sometimes hear it referred to as a *field replaceable unit (FRU)*.

Since I'm talking about components that are inside the case, it would be unfortunate to ignore the case itself. Cases are usually a combination of metal and plastic and serve these two primary functions:

- Keeping all the components securely in place
- Protecting the components from harm

Protecting the components is the key. Water and other liquids are obviously bad for electronic devices, and direct exposure to sunlight and dust can cause parts to overheat and fail. The case guards against all these things. Moreover, in some cases (pun intended), it can make your device easily mobile.



Throughout this section, I will specifically talk about PC (desktop and laptop) hardware. Many of the principles here apply to smaller devices such as tablets and smartphones as well.

Exploring Motherboards, Processors, and Memory

These three components—motherboards, processors, and memory—are the holy trinity of computers. Pretty much every personal computing device made today requires all three of these parts. So, without further ado, let's dive in.

Motherboards

The *motherboard* is the most important component in the computer because it connects all the other components. Functionally, it acts much like the nervous system of the computer. You will also hear it called the *system board* or the *mainboard*. With this introduction, you might think that this piece of hardware is complex—and you'd be right! Manufacturers and hardware resellers don't make it easy to understand what you're dealing with either. Here's the description of a motherboard for sale on an Internet hardware site:


Asus X99-PRO/USB 3.1 Intel X99 Chipset Core i7 Socket R3 (LGA2011)
ATX Motherboard, DDR4, PCI-E 3.0 x16, SATA/M.2 Socket 3, GBLAN,
Wi-Fi/Bluetooth, USB

What does that all mean? Is it even human language? Don't worry. By the end of this section on motherboards, you will understand what it all means.

The first thing to know about motherboards is that they are a *printed circuit board (PCB)*, that is, a conductive series of pathways laminated to a nonconductive substrate that lines the bottom of the computer. Most of the time they are green, but you will also see brown, blue, red, and black ones. If you look at the bottom of a motherboard, you will see

all the conductive pathways. Some of the most popular brands right now are ASUS, GIGABYTE, and MicroStar (MSI). Figure 1.1 shows a typical motherboard.

FIGURE 1.1 A motherboard

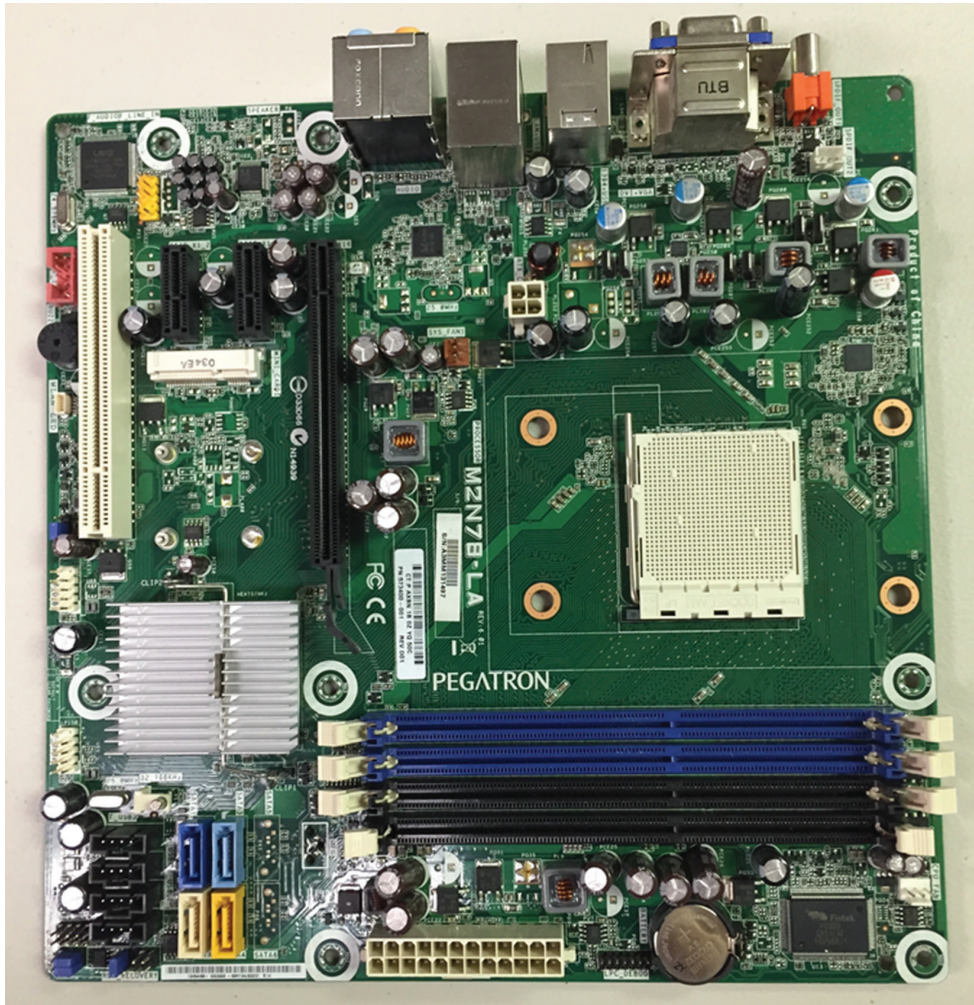

All other components are attached to this circuit board. Some are physically attached directly to the board and aren't intended to be removed, such as the underlying circuitry, the central processing unit (CPU) socket, random access memory (RAM) slots, expansion slots, and a variety of other chips. Components such as the CPU and the RAM get physically attached to the motherboard. Other devices, such as hard drives and power supplies, are attached via their own connectors.



Manufacturers can also integrate components such as the CPU, video card, network card, and others directly onto the motherboard as opposed to having slots into which they are inserted. As a rule of thumb, the smaller the motherboard, the more likely it is to have integrated components.

Let's start breaking down the features and components typically associated with motherboards. The following list might look long, but breaking each one down separately will help you to understand the importance of each one. Here are the topics coming up shortly:

- Form factors
- Chipsets
- Processor sockets
- Memory slots
- Expansion slots
- Disk controllers
- Power connectors
- BIOS/firmware
- CMOS and CMOS battery
- Back-panel connectors
- Front-panel connectors

In the following sections, you will learn about some of the most common components of a motherboard and what they do. I'll show you what each component looks like so that you can identify it on almost any motherboard you run across.

Form Factors

Motherboards are classified by their design, which is called a *form factor*. There are dozens of form factors in existence. Because motherboards mount to the system case, it's important to know what types of motherboards your case supports before replacing one. Desktop computer cases often support multiple sizes of motherboards, but laptops are another story. With laptops, you almost always need to replace an old motherboard with the same version.

The most common form factors used today are Advanced Technology Extended (ATX), micro ATX, and ITX.



ITX is not one specific form factor but a collection of small form factor (SFF) boards.

The form factors differ in size and configuration of the components on the motherboard. In addition, they may have different power requirements. Micro ATX and ITX are specifically designed to be paired with low-wattage power supplies to reduce the amount of heat produced by the computer. Because these two are smaller, they also offer fewer options for adding expansion cards versus the ATX design.



Here's a quick history lesson. The XT form factor was developed by IBM in 1983, and it is generally considered the first industry-standard PC form factor. In 1985, IBM released the Baby-AT, which because of its smaller size quickly became the most popular form factor in the market. The Baby-AT was king until 1996 when Intel released the ATX standard. As of this writing, the ATX and micro ATX (which is similar in configuration to ATX, only smaller) are still the most popular computer form factors.

Table 1.1 provides the dimensions of common form factors.

TABLE 1.1 Motherboard form factors

Form Factor	Release Year	Size
Baby-AT	1985	8.5 × 10–13 in (216 × 254–330 mm)
ATX	1996	12 × 9.6 in (305 × 244 mm)
Micro ATX	1996	9.6 × 9.66 in (244 × 244 mm)
Mini-ITX	2001	6.7 × 6.7 in (170 × 170 mm)
Nano-ITX	2003	4.7 × 4.7 in (120 × 120 mm)
Pico-ITX	2007	3.9 × 2.8 in (100 × 72 mm)
Mobile-ITX	2007	2.95 × 1.77 in (75 × 45 mm)
Neo-ITX	2012	6.7 × 3.35 in (170 × 85 mm)

In view of how quickly computer technology evolves, it is amazing that the form factors remain popular for as long as they do. The advent of smaller devices such as tablets and smartphones has driven the most recent form factor design changes.

Chipsets

The motherboard's *chipset* is a collection of chips or circuits that perform interface and peripheral functions for the processor. Said differently, this collection of chips provides interfaces for memory, expansion cards, and onboard peripherals, and it generally dictates how a motherboard will communicate with the installed peripherals.

Chipsets are usually given a name and model number by the original manufacturer, for example, Intel's X99. What features make the X99 so great? I will be honest; I have no idea. There are so many chipsets out there that it's impossible to know the features of every one. But, if you need to know, having the manufacturer and model can help you look up the features of that particular chipset, such as the type of RAM supported, the type and brand of onboard video, and so on.



The best place to look for motherboard specifications is on the manufacturer's website. For example, <https://www.asus.com/us/Motherboards/PRIME-Z370-A/specifications/> tells you everything that you need to know about the ASUS PRIME Z370-A motherboard.


The functions of chipsets can be divided into two major groups: Northbridge and Southbridge. It's unlikely that you'll be tested on these on the IT Fundamentals+ (ITF+) exam, but I want to introduce them just in case you hear the terms. Plus, I think it helps better explain exactly what the chipset does.

Northbridge The Northbridge subset of a motherboard's chipset performs one important function: management of high-speed peripheral communications. The Northbridge is responsible primarily for communications with integrated video and processor-to-memory communications.

The communications between the CPU and memory occur over what is known as the *front-side bus (FSB)*, which is just a set of signal pathways connecting the CPU and main memory. The *back-side bus (BSB)*, if present, is a set of signal pathways between the CPU and any external cache memory.

Southbridge The Southbridge subset of the chipset is responsible for providing support to the onboard slower peripherals (PS/2, parallel ports, serial ports, Serial and Parallel ATA, and so on) and managing their communications with the rest of the computer and the resources given to them. If you're thinking about any component other than the CPU, memory and cache, or integrated video, the Southbridge is in charge.

Figure 1.2 shows the chipset of a motherboard, with the heat sink of the Northbridge, at the top left, connected to the heat-spreading cover of the Southbridge, at the bottom right.

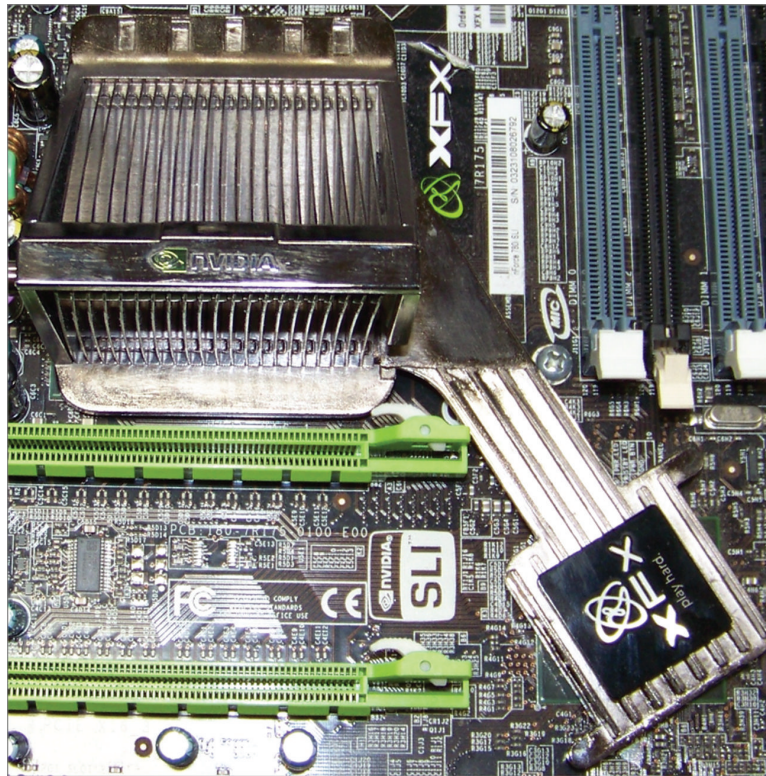FIGURE 1.2 Northbridge and Southbridge

Real World Scenario

Who's Driving the Bus?

When talking about the Northbridge, I mentioned a bus (specifically a front-side bus), so now is a good time to talk about what a bus does and to give you some historical context. You'll probably hear the term come up often when talking about computer hardware, such as in discussions about the system bus, expansion bus, parallel bus, and serial bus.

A *bus* is a common collection of signal pathways over which related devices communicate within the computer system. It refers specifically to a data path or the way that the computer communicates over that path.

Take serial and parallel buses, for example. A serial bus communicates one bit of data at a time, whereas a parallel bus communicates in several parallel channels (eight, for example) at once. Based on this explanation, you might think that parallel is faster than serial. After all, eight lanes should move more data than one lane, right? Sometimes, but not always. It depends on how fast you can get each lane to move.

Serial was developed before parallel, because at its core it's an easier technology to implement. In the late 1980s, parallel became much more popular for printers because it was a lot faster. The only downside to parallel was that the different streams of data needed to be carefully synchronized. This slowed down transmissions so that they weren't exactly eight times faster than the comparable serial connections.

By 1996, manufacturers had advanced the speed of serial technology enough so that it was faster than parallel, and the world saw the introduction of Universal Serial Bus (USB). It was faster than parallel, and it had a lot of additional features, such as the ability to hot plug devices (that is, plug and unplug them without needing to shut the system down). Today, many of the fastest peripheral-connection technologies in use, such as USB, FireWire, and Serial ATA (SATA), are all serial.

Thus, while parallel was king for a day, you can now get faster transmissions via serial technology.


Processor Sockets

The *central processing unit* (CPU) is the “brain” of any computer. There are many different types of processors for computers, and the processor you have must fit into the socket on the motherboard. Typically, in today's computers, the processor is the easiest component to identify on the motherboard. It is usually the component that has either a large fan and/or a *heat sink* (usually both) attached to it.

CPU sockets are almost as varied as the processors they hold. Sockets are basically flat and have several columns and rows of holes or pins arranged in a square, as shown in Figure 1.3. You'll hear terms like pin grid array (PGA) or land grid array (LGA) to describe the socket type. In Figure 1.3, the left socket is PGA, and the right one is an LGA 2011. PGA sockets have holes, and the processors have pins that fit into the holes. LGA sockets have contacts (often pins) built in to them, which connect with contacts on the CPU. Both sockets have locking mechanisms to hold the processor in place. PGA uses a simple lever, while LGA has a more complex locking harness (which is closed in Figure 1.3). You might also see ball grid array (BGA) sockets, which use small balls as their contact points.



At the beginning of this section, I gave you a description of a motherboard for sale. LGA 2011 is the socket shown in the example.

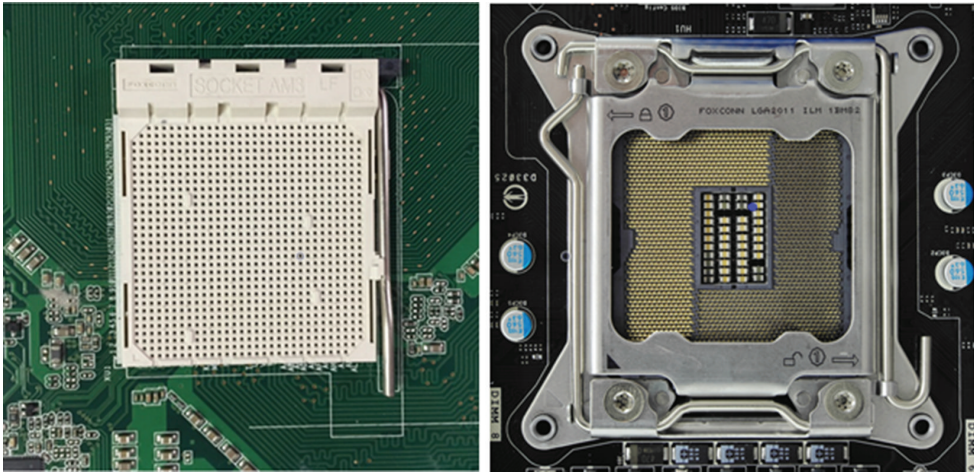FIGURE 1.3 CPU sockets

Intel Socket 2011 by smial (talk). Licensed under FAL via Wikimedia Commons (http://commons.wikimedia.org/wiki/File:Socket_2011_IMGP3918.jpg#/media/File:Socket_2011_IMGP3918.jpg).

Memory Slots

Random access memory (RAM) slots are for the modules that hold memory chips. RAM is the primary memory used to store currently used data and instructions for the CPU. Many and varied types of memory are available for PCs today. Examples include DDR2, DDR3, and DDR4. Memory for desktops comes on circuit boards called *dual inline memory modules (DIMMs)* and for laptops on *small outline DIMMs (SODIMMs)*. (I will talk about what these acronyms mean in the “Memory” section later in this chapter.)

Memory slots are easy to identify on a motherboard. First, they are long and slender and generally close to the CPU socket. Classic DIMM slots were usually black and, like all memory slots, were placed very close together. (Today manufacturers make memory slots of various colors.) Metal pins in the bottom make contact with the metallic pins on each memory module. Small metal or plastic tabs on each side of the slot keep the memory module securely in its slot. Figure 1.4 shows some memory slots on a desktop motherboard.

Laptops are space constrained, so they use the smaller form factor SODIMM chips. SODIMM slots are configured so that the chips lie nearly parallel to the motherboard, as shown in Figure 1.5.

Motherboard designers can also speed up the system by adding *cache memory* between the CPU and RAM. Cache is a fast form of memory, and it improves system performance by predicting what the CPU will ask for next and prefetching this information before being asked. I will talk about cache more in the “Processors” section later in this chapter.

If there is cache on your motherboard, it is not likely to be a removable component. Therefore, it does not have a slot or connector like RAM does.

FIGURE 1.4 DIMM slots

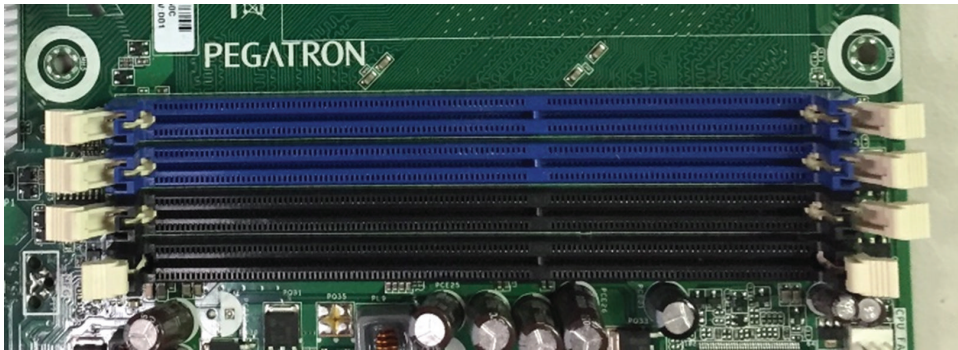


FIGURE 1.5 SODIMM slots



Expansion Slots

The most visible parts of any motherboard are the *expansion slots*. These are small plastic slots, usually from 1 to 6 inches long and approximately ½ inch wide. As their name suggests, these slots are used to install various devices in the computer to expand its capabilities. Some expansion devices that might be installed in these slots include video, network, sound, and disk interface cards.

If you look at the motherboard in your computer, you will more than likely see one of these main types of expansion slots used in computers today:

- PCI
- AGP
- PCIe

Each type differs in appearance and function. In the following sections, I will cover how to identify visually the different expansion slots on the motherboard.

PCI Expansion Slots

Some of the most common expansion slots for many years were the 32-bit *Peripheral Component Interconnect (PCI)* slots. They are easily recognizable because they are only around 3 inches long and classically white, although modern boards take liberties with the color. Although popularity has shifted from PCI to PCIe, the PCI slot's service to the industry cannot be ignored; it has been an incredibly prolific architecture for many years.

PCI expansion buses operate at 33 MHz or 66 MHz over a 32-bit (4-byte) channel, resulting in data rates of 133 megabytes per second (MBps) and 266 MBps, respectively, with 133 MBps being the most common. PCI is a shared-bus topology, which means that mixing 33 MHz and 66 MHz adapters in a 66 MHz system will slow all adapters to 33 MHz.



Real World Scenario

Understanding Data Rates

It can be a bit confusing trying to understand how bus speeds relate to data rates, but it doesn't have to be so. The quick way to figure it out is to take the bus speed (how fast it is) and multiply it by the channel width (how much it can push through in bytes) to get the data rate. Now, you might be thinking, "Wait. 33 times 4 is 132, and 66 times 4 is 264. That's different than 133 MBps or 266 MBps." You're absolutely correct. In a creative use of marketing math, some rounding was applied. You'll see this a lot in the computer industry; many specs will end in 33 or 66, even if the real math doesn't quite work out that way.